

MONTAJE Y CONEXIÓN - MOUNTING AND CONNECTION

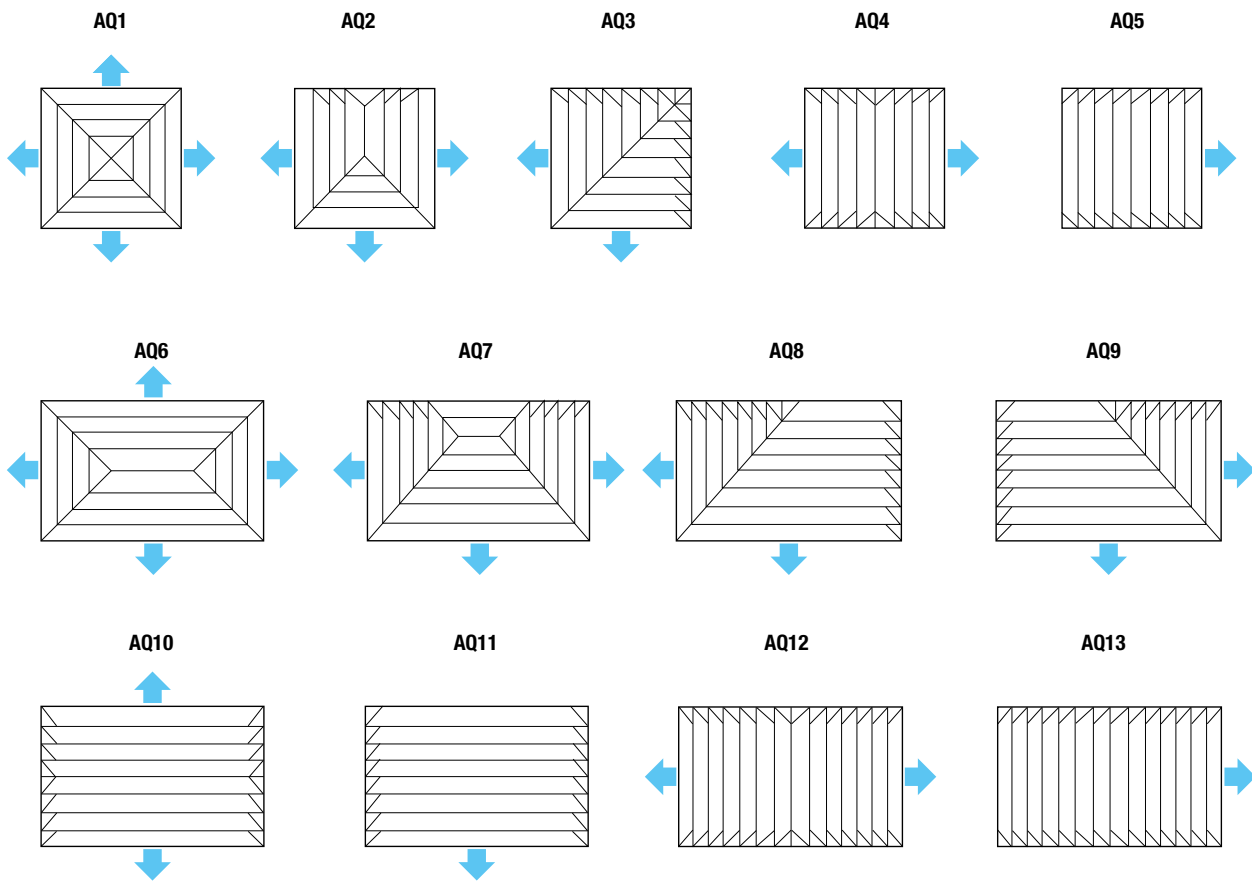
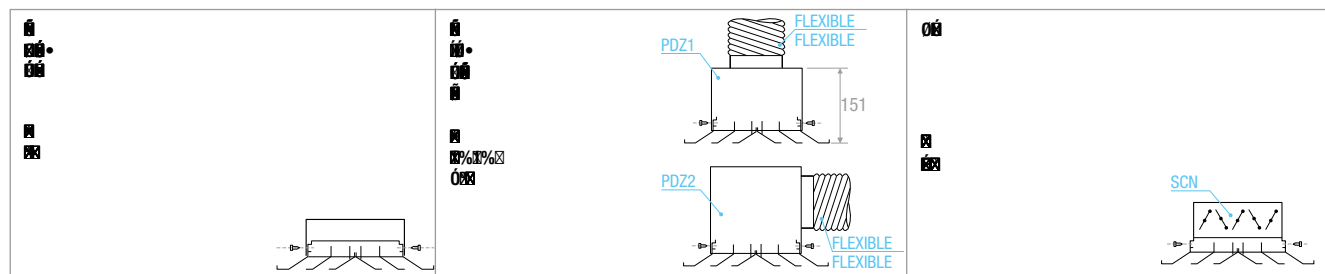


DIAGRAMA SELECCIÓN RÁPIDA - QUICK SELECTION DIAGRAM

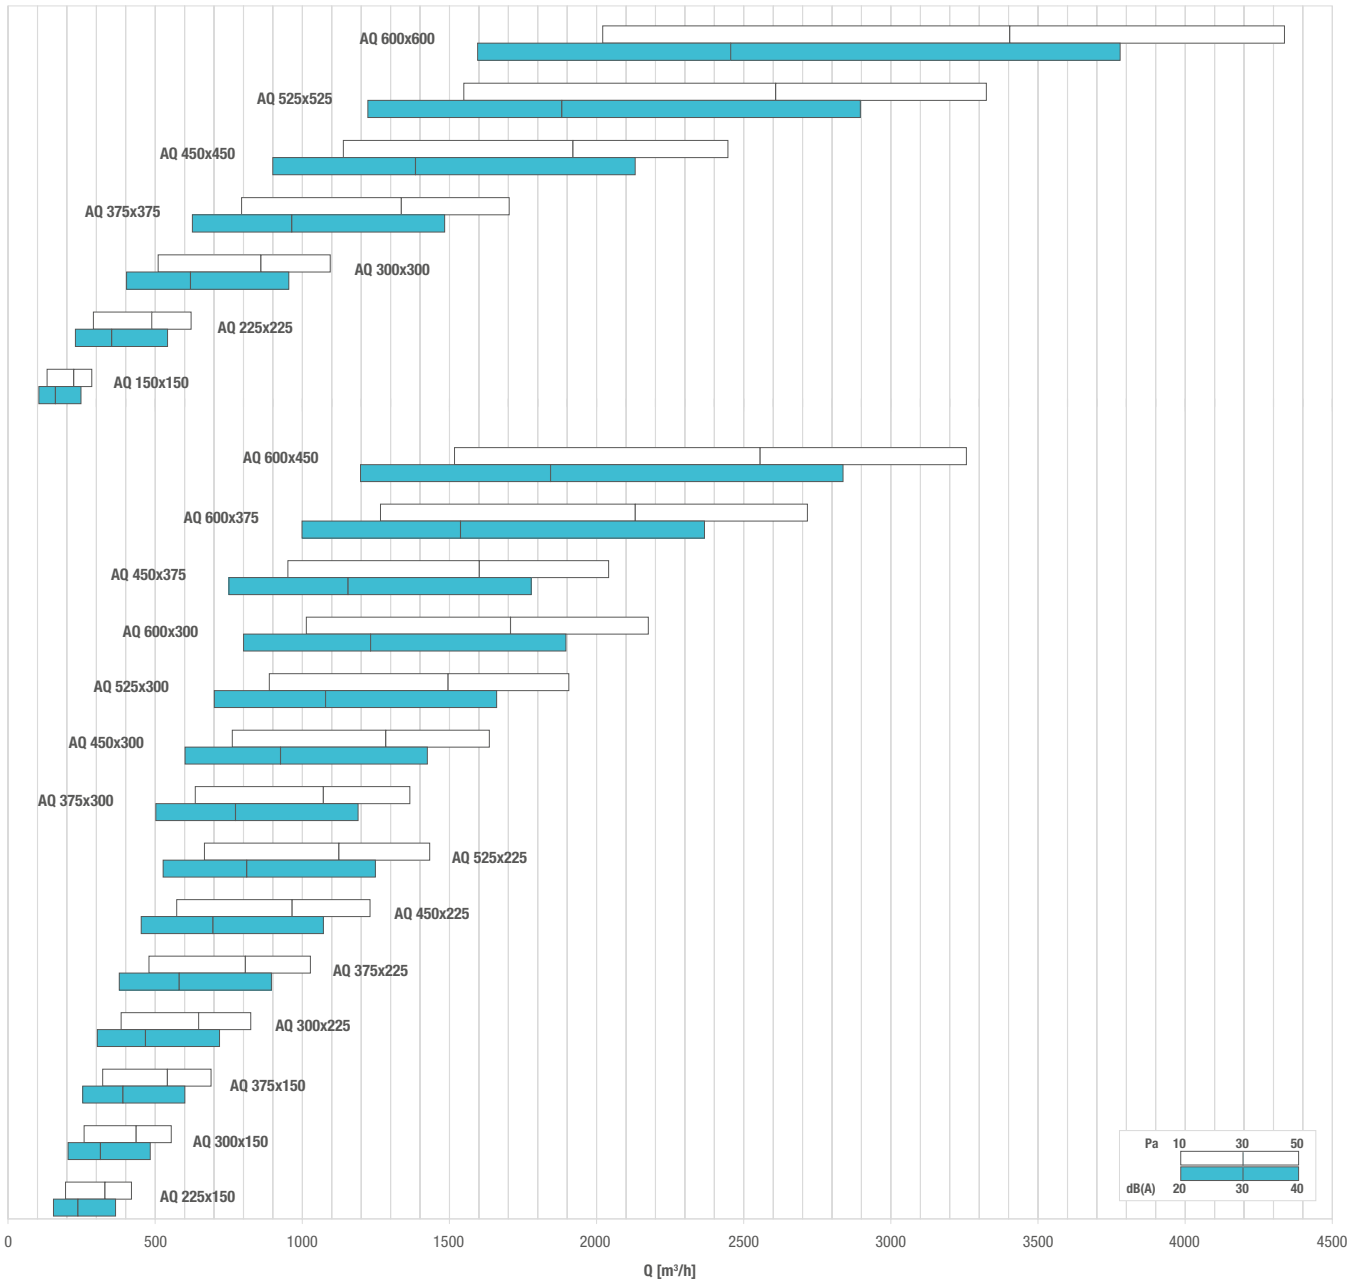


TABLA DE SELECCIÓN - SELECTION TABLE

Modelo - Model	A <sub>k</sub> * [m <sup>2</sup> ]		Q [m <sup>3</sup> /h]		L <sub>WA</sub> [dB(A)]		X <sub>(0,25)</sub> ** [m]		Dp <sub>i</sub> [Pa]	
	min	max	min	max	min	max	min	max	min	max
<b>AQ 150x150</b>	0,0080	0,0099	130	290	35	53	1,7	3,4	10	50
<b>AQ 225x225</b>	0,0179	0,0214	290	620	35	53	2,5	5,0	10	50
<b>AQ 300x300</b>	0,0317	0,0379	510	1100	35	53	3,2	6,6	10	50
<b>AQ 375x375</b>	0,0494	0,0592	790	1700	35	53	4,0	8,3	10	50
<b>AQ 450x450</b>	0,0711	0,0853	1140	2450	35	53	4,8	10,0	10	50
<b>AQ 525x525</b>	0,0967	0,1161	1550	3320	35	53	5,6	11,6	10	50
<b>AQ 600x600</b>	0,1262	0,1517	2020	4340	35	53	6,4	13,4	10	50
<b>AQ 225x150</b>	0,0120	0,0145	200	420	35	53	2,5	5,2	10	50
<b>AQ 300x150</b>	0,0160	0,0191	260	560	35	53	2,8	5,8	10	50
<b>AQ 375x150</b>	0,0199	0,0237	320	690	35	53	3,1	6,4	10	50
<b>AQ 300x225</b>	0,0238	0,0284	380	830	35	53	3,3	6,9	10	50
<b>AQ 375x225</b>	0,0297	0,0355	480	1030	35	53	3,6	7,6	10	50
<b>AQ 450x225</b>	0,0356	0,0426	570	1230	35	53	3,9	8,3	10	50
<b>AQ 525x225</b>	0,0416	0,0498	670	1430	35	53	4,2	8,8	10	50
<b>AQ 375x300</b>	0,0396	0,0474	640	1370	35	53	4,1	8,7	10	50
<b>AQ 450x300</b>	0,0475	0,0569	760	1640	35	53	4,4	9,4	10	50
<b>AQ 525x300</b>	0,0553	0,0663	890	1910	35	53	4,7	10,0	10	50
<b>AQ 600x300</b>	0,0632	0,0758	1010	2180	35	53	5,0	10,6	10	50
<b>AQ 450x375</b>	0,0593	0,0711	950	2040	35	53	4,9	10,3	10	50
<b>AQ 600x375</b>	0,0790	0,0948	1270	2720	35	53	5,5	11,7	10	50
<b>AQ 600x450</b>	0,0947	0,1137	1520	3260	35	53	6,0	12,7	10	50

\* Dependiente del tipo y número de vías del difusor AQ. \*\* Valor indicativo para el modelo de 4 vías

\* Depending on kind and ways number of AQ diffuser. \*\* Indicative value for 4 ways model.

